



# RL PGL Panel light


RL PGL is a direct lighting body with anti-glare lenses for UGR19.

High efficiency SMD leds are used to create uniformity. Ideal for indoor environments.


RL PGL è un corpo illuminante a luce diretta con lenti antiabbagliamento per UGR<19.

Vengono utilizzati led SMD ad alta efficienza per una uniformità ideale per ambienti interni.

RL PGL ist ein direkt lichtreflektierender Leuchtkörper mit Blendschutzscheiben für UGR<19. Es werden hocheffiziente SMD-Leds für Uniformität verwendet.

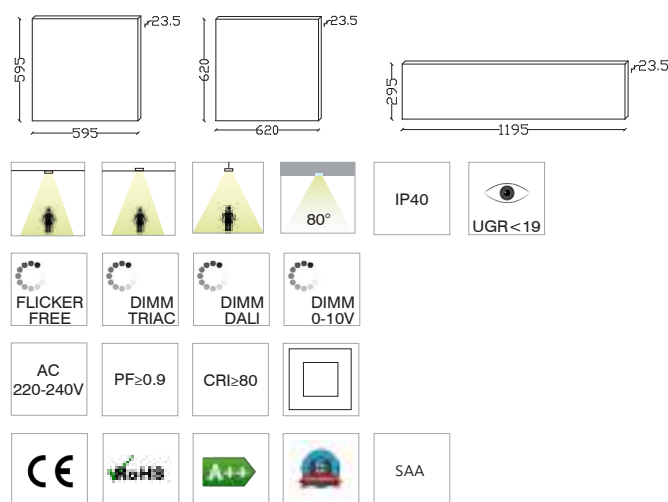

Code	Watt	Size (AxBxCmm)	Cut-out (±5mm)	Lumen (±5%)	N.W/pc (kgs)	Q'ty/CTN
RLPGL6060W	35W	595X595X23.5	580X580	3960lm	3.50	4PCS
RLPGL6060N	35W	595X595X23.5	580X580	4085lm	3.50	4PCS
RLPGL6262W	35W	620X620X23.5	605X605	3965lm	3.65	4PCS
RLPGL6262N	35W	620X620X23.5	605X605	4090lm	3.65	4PCS
RLPGL12030W	35W	1195X295X23.5	1080X80	3875lm	3.55	4PCS
RLPGL12030N	35W	1195X295X23.5	1080X80	3995lm	3.55	4PCS

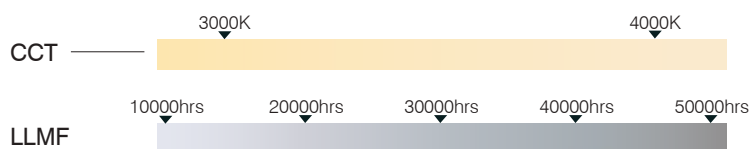

Color



White

(L80B20)





# RL PGL Panel light


## RECESSED INSTALLATION

1



RECESSED


2

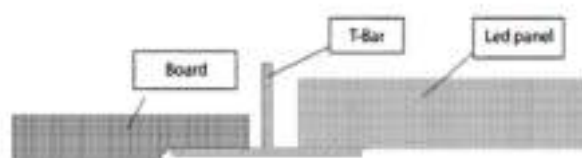

DETAIL DRAWING TO SURFACE MOUNTING INSTALLATION

## SUSPENDED INSTALLATION

1




DRILL 4 HOLES IN THE CEILING WITH THE DEPTH 35MM AND MAKE SURE NEIGHBORING HOLES SPACE IS ABOUT 497,1x579,3MM, PRESS DOWN PLASTIC ANCHORS IN THE HOLES AND MAKE THEM PARALLEL TO THE CEILING, THEN FIX M3,5 SCREWS ON PLASTIC ANCHORS AFTER CROSSING FIXED BASE.

2




FASTEN STRIP AFTER MAKE ITS TERMINAL CROSS THE FIXED BASE.

3



TWIST STRIP CONTROLLERS (4 UNITS WITH M3 THREAD) INTO THE HOLES ON THE BACK OF LIGHT PAN, MAKE THE STRIP CROSS THE CONTROLLER AND FIT IT, JOIN THE CABLE CLIPS WITH THE STRIPS IN CASE INVALID WORK OF THE CONTROLLER.

4



ADJUST HEIGHT OF 4 STRIPS TO MAKE THE LIGHT PERFECTLY PARALLEL TO THE CEILING, AND INSTALL LED DRIVER, SWITCH ON THE LIGHT.



# RL PGL Panel light

## SURFACE MOUNTING INSTALLATION

1



DRILL 4 HOLES WITH DEPTH 35MM IN THE CEILING BY 6 SIZE BIT (HOLES SPACE 520x230 MM).

2



PRESS DOWN PLASTIC ANCHORS IN THE HOLES AND MAKE THEM PARALLEL TO THE CEILING. FIX M3.5 SCREWS ON PLASTIC ANCHORS TILL 5MM OF SCREW HEAD REMAINS OUTSIDE.

3



SLIP THE FIXTURE BY MAKING THE HOLES ON IT MATCH UP THE SCREWS, AND THEN FIX THE SCREWS.

4



PUT THE PANEL LIGHT INSIDE OF THE FRAME.

5



HANG UP THE FRAME ON THE FIXTURE AND FIX THE SCREWS.