

A large, abstract, 3D-rendered light fixture in a light gray color, featuring a thick, curved band that spirals upwards. A solid red horizontal bar is positioned to the left of the main title text.

# DECORATIVE LIGHT

RL DECORATIVE LIGHT: A DIFFERENT CONCEPT OF LIGHT!

# DECORATIVE LIGHT 18W

## DECORATIVE LIGHT: ONE OF A KIND

Once installed the environment changes completely. Two installation options are available: suspended or directly to the ceiling. The new design makes this product the perfect solution for showrooms, commercial areas, markets, museums, hotels, restaurants, etc.

## DECORATIVE LIGHT: UNICA NEL SUO GENERE

Una volta installata l'ambiente cambia completamente. Si può scegliere se installarla sospesa oppure direttamente sul soffitto. Il nuovo design rende questo prodotto la soluzione ideale per showroom, aree commerciali, supermercati, musei, hotel, ristoranti, etc.

## DECORATIVE LIGHT: AUSSERGEWÖHNLICH IN SEINEM GENRE

Einmal installiert, wechselt das Ambiente vollkommen. Man kann auswählen, ob die Lampe hängend oder direkt an der Decke installiert wird. Durch das neue Design ist dieses Produkt ideal für Showrooms, Kaufhäuser, Supermärkte, Museen, Hotels, Restaurants, etc.



LIGHT BLUE ORANGE



YELLOW BLACK



C.R.I. COMPARISON



OUR DECORATIVE LIGHT C.R.I. 90

NORMAL LIGHT C.R.I. 70

### TECHNICAL DATA

ARTICLE NUMBER	140899-DXW	140899-DXN	140899-DXC
NAME OF PRODUCT	DECORATIVE LIGHT 18W		
INNER CARTON	1	1	1
MASTER CARTON	1	1	1
WEIGHT SINGLE PIECE	1,400Kg	1,400Kg	1,400Kg

### GENERAL CHARACTERISTICS

MAIN APPLICATION	Commercial lighting	Commercial lighting	Commercial lighting
NOMINAL LIFETIME	> 50.000 hours	> 50.000 hours	> 50.000 hours
SOURCE (LED TYPE)	SMD 2835	SMD 2835	SMD 2835
IP RATE	IP 40	IP 40	IP 40

### LIGHTING DATA

COLOR TEMPERATURE	3.000K ±300	4.000K ± 300	6.000K ±300
CRI	>90	>90	>90
LUMINOUS FLUX	>1.940 Lm	>2.160 Lm	>2.380 Lm
LLMF (LUMEN MAINTENANCE)	70% AFTER 25.000 hrs	70% AFTER 25.000 hrs	70% AFTER 25.000 hrs
RATED BEAM ANGLE	> 120°	> 120°	> 120°

### ELECTRICAL DATA

SYSTEM POWER	18W	18W	18W
START TIME (SECOND)	< 0,5 S	< 0,5 S	< 0,5 S
WARM-UP TIME TO 60% LIGHT OUTPUT	INSTANT FULL LIGHT	INSTANT FULL LIGHT	INSTANT FULL LIGHT
INPUT VOLTAGE	AC 100-277V	AC 100-277V	AC 100-277V
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz
POWER FACTOR	> 93	> 93	> 93
DIMMABLE	YES 1-10V	YES 1-10V	YES 1-10V
ENERGY SAVING	YES	YES	YES
WORKING TEMPERATURE	-20°/45°C	-20°/45°C	-20°/45°C
HUMIDITY	< 85%	< 85%	< 85%

### DIMENSION

DIMENSION OF THE PRODUCT	Ø298x51x1.500 mm	Ø298x51x1.500 mm	Ø298x51x1.500 mm
--------------------------	------------------	------------------	------------------

### COLOR

COLOR OF THE PRODUCT	X=W WHITE	X=B BLACK	X=L LIGHT BLUE	X= O ORANGE	X=Y YELLOW
----------------------	-----------	-----------	----------------	-------------	------------

### APPROVAL & APPLICATIONS CHARS

VDE MARKING	IN PROCESS	IN PROCESS	IN PROCESS
CE MARKING	YES	YES	YES
UL MARKING	IN PROCESS	IN PROCESS	IN PROCESS
ROHS COMPLIANCE	YES	YES	YES

# DECORATIVE LIGHT 25W

## DECORATIVE LIGHT: ONE OF A KIND

Once installed the environment changes completely.

Two installation options are available: suspended or directly to the ceiling. The new design makes this product the perfect solution for showrooms, commercial areas, markets, museums, hotels, restaurants, etc.

## DECORATIVE LIGHT: UNICA NEL SUO GENERE

Una volta installata l'ambiente cambia completamente.

Si può scegliere se installarla sospesa oppure direttamente sul soffitto.

Il nuovo design rende questo prodotto la soluzione ideale per showroom, aree commerciali, supermercati, musei, hotel, ristoranti, etc.

## DECORATIVE LIGHT: AUSSERGEWÖHNLICH IN SEINEM GENRE

Einmal installiert, wechselt das Ambiente vollkommen. Man kann auswählen, ob die Lampe hängend oder direkt an der Decke installiert wird. Durch das neue Design ist dieses Produkt ideal für Showrooms, Kaufhäuser, Supermärkte, Museen, Hotels, Restaurants, etc.



LIGHT BLUE

ORANGE



YELLOW

BLACK

### C.R.I. COMPARISON



OUR DECORATIVE LIGHT CRI>90

NORMAL LIGHT C.R.I. 70



## TECHNICAL DATA

ARTICLE NUMBER	140900-DXW	140900-DXN	140900-DXC
NAME OF PRODUCT	DECORATIVE LIGHT 25W		
INNER CARTON	1	1	1
MASTER CARTON	1	1	1
WEIGHT SINGLE PIECE	1,400Kg	1,400Kg	1,400Kg

## GENERAL CHARACTERISTICS

MAIN APPLICATION	Commercial lighting	Commercial lighting	Commercial lighting
NOMINAL LIFETIME	> 50.000 hours	> 50.000 hours	> 50.000 hours
SOURCE (LED TYPE)	SMD 2835	SMD 2835	SMD 2835
IP RATE	IP 40	IP 40	IP 40

## LIGHTING DATA

COLOR TEMPERATURE	3.000K ±300	4.000K ± 300	6.000K ±300
CRI	>90	>90	>90
LUMINOUS FLUX	>2.700 Lm	>3.000 Lm	>3.300 Lm
LLMF (LUMEN MAINTENANCE)	70% AFTER 25.000 hrs	70% AFTER 25.000 hrs	70% AFTER 25.000 hrs
RATED BEAM ANGLE	> 120°	> 120°	> 120°

## ELECTRICAL DATA

SYSTEM POWER	25W	25W	25W
START TIME (SECOND)	< 0,5 S	< 0,5 S	< 0,5 S
WARM-UP TIME TO 60% LIGHT OUTPUT	INSTANT FULL LIGHT	INSTANT FULL LIGHT	INSTANT FULL LIGHT
INPUT VOLTAGE	AC 100-277V	AC 100-277V	AC 100-277V
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz
POWER FACTOR	> 93	> 93	> 93
DIMMABLE	YES 1-10V	YES 1-10V	YES 1-10V
ENERGY SAVING	YES	YES	YES
WORKING TEMPERATURE	-20°/45°C	-20°/45°C	-20°/45°C
HUMIDITY	< 85%	< 85%	< 85%

## DIMENSION

DIMENSION OF THE PRODUCT	Ø298x51x1.500 mm	Ø298x51x1.500 mm	Ø298x51x1.500 mm
--------------------------	------------------	------------------	------------------

## COLOR

COLOR OF THE PRODUCT	X=W WHITE	X=B BLACK	X=L LIGHT BLUE	X= O ORANGE	X=Y YELLOW
----------------------	-----------	-----------	----------------	-------------	------------

## APPROVAL & APPLICATIONS CHARS

VDE MARKING	IN PROCESS	IN PROCESS	IN PROCESS
CE MARKING	YES	YES	YES
UL MARKING	IN PROCESS	IN PROCESS	IN PROCESS
ROHS COMPLIANCE	YES	YES	YES

# DECORATIVE LIGHT 35W

## DECORATIVE LIGHT: ONE OF A KIND

Once installed the environment changes completely. Two installation options are available: suspended or directly to the ceiling. The new design makes this product the perfect solution for showrooms, commercial areas, markets, museums, hotels, restaurants, etc.

## DECORATIVE LIGHT: UNICA NEL SUO GENERE

Una volta installata l'ambiente cambia completamente. Si può scegliere se installarla sospesa oppure direttamente sul soffitto. Il nuovo design rende questo prodotto la soluzione ideale per showroom, aree commerciali, supermercati, musei, hotel, ristoranti, etc.

## DECORATIVE LIGHT: AUSSERGEWÖHNLICH IN SEINEM GENRE

Einmal installiert, wechselt das Ambiente vollkommen. Man kann auswählen, ob die Lampe hängend oder direkt an der Decke installiert wird. Durch das neue Design ist dieses Produkt ideal für Showrooms, Kaufhäuser, Supermärkte, Museen, Hotels, Restaurants, etc.



LIGHT BLUE

ORANGE



YELLOW

BLACK



C.R.I. COMPARISON



OUR DECORATIVE LIGHT C.R.I. 90

NORMAL LIGHT C.R.I. 70

### TECHNICAL DATA

ARTICLE NUMBER	140901-DXW	140901-DXN	140901-DXC
NAME OF PRODUCT		DECORATIVE LIGHT 35W	
INNER CARTON	1	1	1
MASTER CARTON	1	1	1
WEIGHT SINGLE PIECE	1,920Kg	1,920Kg	1,920Kg

### GENERAL CHARACTERISTICS

MAIN APPLICATION	Commercial lighting	Commercial lighting	Commercial lighting
NOMINAL LIFETIME	> 50.000 hours	> 50.000 hours	> 50.000 hours
SOURCE (LED TYPE)	SMD 2835	SMD 2835	SMD 2835
IP RATE	IP 40	IP 40	IP 40

### LIGHTING DATA

COLOR TEMPERATURE	3.000K ±300	4.000K ± 300	6.000K ±300
CRI	>90	>90	>90
LUMINOUS FLUX	>3.780 Lm	>4.200 Lm	>4.620 Lm
LLMF (LUMEN MAINTENANCE)	70% AFTER 25.000 hrs	70% AFTER 25.000 hrs	70% AFTER 25.000 hrs
RATED BEAM ANGLE	> 120°	> 120°	> 120°

### ELECTRICAL DATA

SYSTEM POWER	35W	35W	35W
START TIME (SECOND)	< 0,5 S	< 0,5 S	< 0,5 S
WARM-UP TIME TO 60% LIGHT OUTPUT	INSTANT FULL LIGHT	INSTANT FULL LIGHT	INSTANT FULL LIGHT
INPUT VOLTAGE	AC 100-277V	AC 100-277V	AC 100-277V
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz
POWER FACTOR	> 93	> 93	> 93
DIMMABLE	YES 1-10V	YES 1-10V	YES 1-10V
ENERGY SAVING	YES	YES	YES
WORKING TEMPERATURE	-20°/45°C	-20°/45°C	-20°/45°C
HUMIDITY	< 85%	< 85%	< 85%

### DIMENSION

DIMENSION OF THE PRODUCT	Ø400x67x1.500 mm	Ø400x67x1.500 mm	Ø400x67x1.500 mm
--------------------------	------------------	------------------	------------------

### COLOR


COLOR OF THE PRODUCT	X=W WHITE	X=B BLACK	X=L LIGHT BLUE	X= O ORANGE	X=Y YELLOW
----------------------	-----------	-----------	----------------	-------------	------------

### APPROVAL & APPLICATIONS CHARS

VDE MARKING	IN PROCESS	IN PROCESS	IN PROCESS
CE MARKING	YES	YES	YES
UL MARKING	IN PROCESS	IN PROCESS	IN PROCESS
ROHS COMPLIANCE	YES	YES	YES

# DECORATIVE LIGHT

## INSTALLATION




Surface mount bracket  
 Type (A): Ring version, ceiling visible  
 Type (B): Disc version, completely closed, ceiling invisible  
 Surface mount bracket, choose either type A or Type B before purchasing.



accessory pack

1

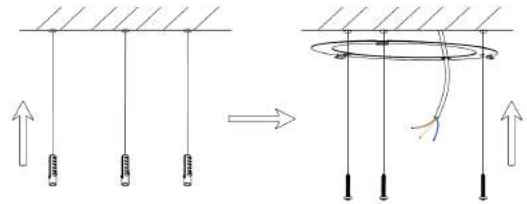


Punch the plastic anchor into ceiling.



Fix bracket onto ceiling with screws.


2

Wiring the input AC cable to the lamp

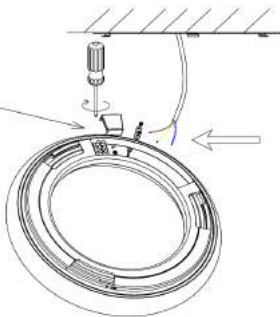

— L = BROWN  
 — N = BLUE  
 — ⊕ = YELLOW-GREEN


3

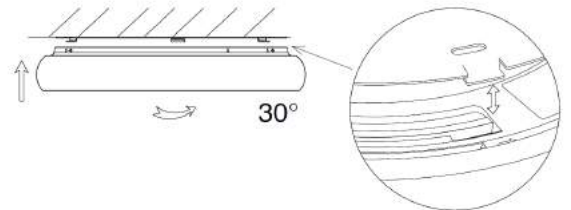

Rotate lamp housing to bracket properly. And check for correct installation.


4

Finish




5

## SUSPENDED INSTALLATION

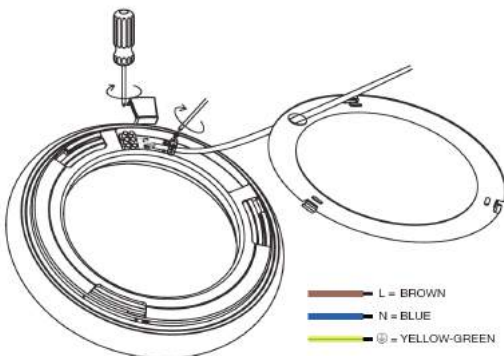


— L = BROWN  
 — N = BLUE  
 — ⊕ = YELLOW-GREEN

1

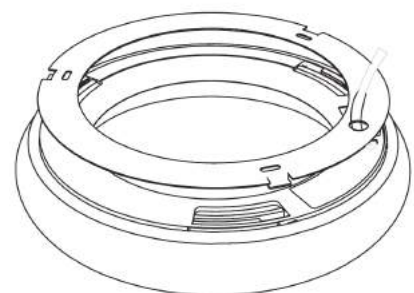


2

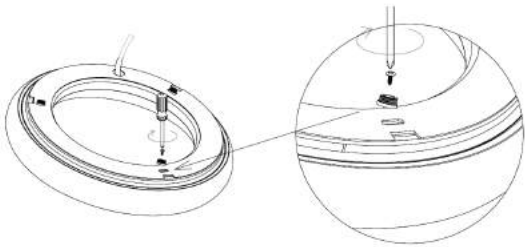


1. Attach transparent DC wire to suspending rope by clips;
2. Fix the suspending ropes on the bases.

Fix three pieces of bases on surface mounted bracket.

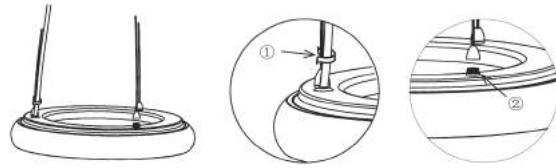


3

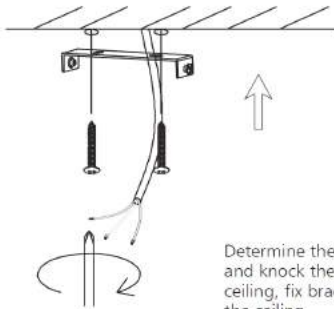


Determine the mounting location and knock the plastic anchor into ceiling, fix bracket with screws onto the ceiling.

4

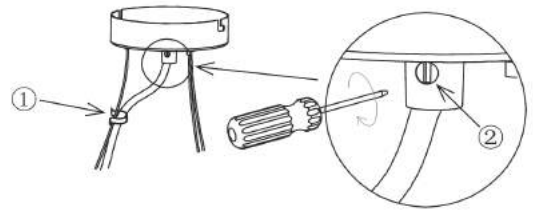

1. Insert the transparent cable through cable entry;
2. Tighten screw by screwdriver to fix the cable.



5



Feed the main cable in terminal block respectively.

- L = BROWN
- N = BLUE
- ⊕ = YELLOW-GREEN



6

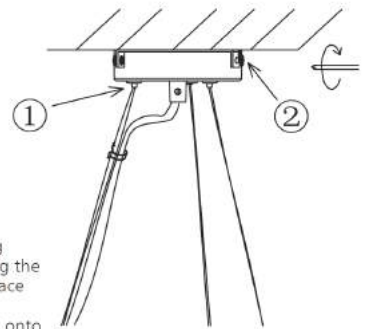

1. Adjust the suspending wire length by pressing the locking device on surface mount box,
2. Fix surface mount box onto bracket with screw.

7

Finish

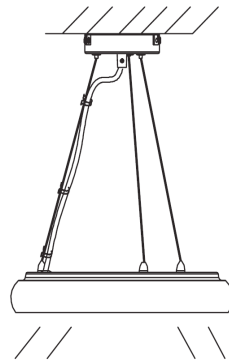

8